

BERTIN TECHNOLOGIES



Table of contents

Handmonitoren	4
MINITRACE CSDF - Bertin Instruments	5
MiniTRACE S5 - Saphymo	8
MiniTRACE γ	9
SaphyRAD S	10
SaphyRAD C	11
SaphyRAD E Multiprobe - Bertin Instruments	12
AlphaE - Bertin Instruments	13
SaphyRAD MS Dom-420 - Bertin Instruments	14
Persoonlijke elektronische dosimeters	15
Saphydose gamma i	16
Milieumonitoring	17
GammaTRACER Spider Autonomous Gamma Monitor for Emergencies - Saphymo	18
AlphaGUARD-Radon Monitor - Bertin Instruments	19
ShortLINK Short-Range Environmental Radiation Monitoring Network - Bertin/ Saphymo	21
GammaTRACER Autonomous Radiation Monitoring Probe - Saphymo	22
BAB E Air Monitoring Beacon	25
SkyLINK Wide-Range Environmental Radiation Monitoring Network - Bertin/ Saphymo	26
AlphaE - Bertin Instruments	27
SpectroTRACER Environmental Radiation Monitor - Saphymo	28
Skydose Dosimetry System - Bertin Instruments	29
Coriolis RECON - Bertin Instruments	31
Coriolis Micro - Bertin Instruments	32
Afval- en recyclingbeheer	33
Coriolis Consumables - Bertin Instruments	34



Bertin Instruments is een wereldwijde leverancier van geavanceerde oplossingen voor stralingsdetectie en milieumonitoring, gespecialiseerd in draagbare monitoren, persoonlijke elektronische dosimeters, milieumonitoringsystemen en technologieën voor afval- en recyclingbeheer. Hun instrumenten zijn ontworpen om te voldoen aan de strenge eisen van nucleaire installaties, noodhulpdiensten en milieugentschappen.

Hun draagbare monitoren en persoonlijke elektronische dosimeters bieden realtime stralingsbeoordeling en garanderen zo de veiligheid van personeel in verschillende operationele omgevingen. De milieumonitoringsystemen van Bertin bieden continue bewaking van lucht, water en bodem, waardoor radiologische bedreigingen vroegtijdig kunnen worden gedetecteerd en aan wettelijke normen kan worden voldaan. Op het gebied van afval- en recyclingbeheer maken hun oplossingen de detectie en beheersing van radioactieve stoffen mogelijk, wat veilige en duurzame praktijken bevordert.

Door geavanceerde technologie te integreren met een gebruikersgericht ontwerp, levert Bertin Instruments betrouwbare tools die kritische besluitvorming ondersteunen en veiligheidsprotocollen verbeteren.

Verhoog uw mogelijkheden voor stralingsveiligheid en milieumonitoring met de uitgebreide oplossingen van Bertin Instruments.

HANDMONITOREN





MINITRACE CSDF - Bertin Instruments

MiniTRACE CSDF is a unique multipurpose meter for contamination control, survey, dose rate and X Rays radiation measurement.

The MiniTRACE CSDF is a multipurpose instrument fulfilling the functions of a contamination, survey and dose rate meter. It is designed to improve the detection and the quantification of radiation contamination, making this a frontline tool in the protection against uncontrolled distribution of radioactive material. MiniTRACE CSDF provides several functions and measurement modes such as the dose rate, the activity or the count rate.

With the activity and surface contamination modes, different nuclides can be selected from the inbuilt library. The surface contamination mode is calibrated according to ISO 7503-1. Combined with the right accessories, wipe tests (surface contamination) and food tests (food contamination) can be performed. A mean value mode and a count up mode are provided to increase instrument accuracy.



Datasheet

Radiation type

- Alpha, beta and gamma

Detector type

- Geiger-Mueller pancake, active counter area 15.5 cm², active diameter 44.5 mm, window 2.0 mg/cm², energy compensated

Display unit

- μ Sv/h, cps, Bq, Bq/cm² and Bq/L

Measurement range

- Dose rate: up to 5,000 μ Sv/h (100 mR/h)
- Pulses: up to 10,000 cps (300,000 cpm)
- Activity (depends on the radionuclide): up to 100 000 Bq (999,000 dpm)
- Surface contamination (depends on the radionuclide): up to 5,000 Bq/cm² (30,000 dm/cm²)
- Food: up to 100,000 Bq/l (1,000,000 pCi/l)

Gamma sensitivity

- 4.3 cps/ μ Sv/h

Energy Range

- 26 keV to 1.25 MeV, lid has to be closed

Sensitivity

- Co60: 0.41 cps/Bq/cm²; C14: 1.65 cps/Bq/cm²; Sr90+: 10.65 cps/Bq/cm²; Am-14: 4.19 cps/Bq/cm²; Cl36: 9.57 cps/Bq/cm²; Cs137: 11.15 cps/Bq/cm²; U238: 4.19 cps/Bq/cm²; I131: 9.71 cps/Bq/cm²

Display

- 6-digit LCD display, plus 5-digit alpha numeric display for alarm- and status messages

Grid

- 0.8 stainless steel, 80% transparency, easily removable

Integration time

- Automatic, with count up mode adjustable

Energy supply

- 2 Mignon batteries (type: LR6, AA, MN 1500) 1.5V

Battery autonomy

- Up to 2,000 h

Built-in sensors

- IR-interface for software communication



Benefits

Easy and fast monitoring

- MiniTRACE CSDF is easy to use (2 buttons interface) and provides a very fast response time (1sec.). It can also be set up with the optional DataVIEW software.

All-in-one survey meter

- MiniTRACE CSDF allows multipurpose measurements for dose rate H*(10) (μ Sv/h), count rate (cps), activity (Bq), surface contamination (Bq/cm²) and food contamination (Bq/L). Radionuclide can also be selected.

Designed for harsh environments

- MiniTRACE CSDF is compact and robust with its strong housing protected with a rubber boot. It is suitable for long time operations (battery lifetime: 2,000 h).

Technologies

MiniTRACE CSDF is a unique multipurpose meter for contamination, survey, dose rate, X Rays, food and wipe test measurements. It is equipped with a 15.55 cm² Geiger-Mueller pancake detector and a 0.8 mm stainless steel grid. In addition to the verification of contamination, it is ideally suited to measuring the environmental dose rate equivalent (H*(10)).

MiniTRACE CSDF displays values in cps, µSv/h, Bq, Bq/cm² and Bq/L. For the Bq and Bq/cm² modes, the user can select different nuclides with built in nuclide specific calibration library (Cs137, Am241, I131, Sr90, U238, C14, Cl36, Co60).

The Bq/cm² mode (for surface contamination) is calibrated according to ISO 7503-1. MiniTRACE CSDF offers a special mode for food measurement: it measures the activity level found in the liquid or smashed food, with a state-of-the-art food measuring kit.

Accessories

- Protective rubber cover (included)
- Communication kit (incl. DataVIEW software and IR transceiver)
- Transparent plastic protection

- Belt pouch
- Suitcase (Pelicase)
- Wipe test kit

- Food measuring kit
- Emergency case
- Pressure-tight container for air transport

← **Back to partner**



Stralingsdetectie > Handmonitoren

MiniTRACE S5 - Saphymo

The MiniTRACE S5 is a contamination meter designed to improve the safety of workers in all different kinds of fields. It's very sensitive and responds within a second.

Because the device is very user-friendly, it's very easy to detect possible spots of contamination in the controlling areas. The 6-digit display shows the activity value with a fixed decimal point.

The MiniTRACE has four pre-programmed alarm thresholds, but users can also adjust these to their personal needs.



This contamination meter is not only easy to use, but it's also very fast. If the device detects something, it will respond within a second. The device is applicable to many fields, like nuclear power plants, research centers, hospitals, police, fire brigades and the army.

BENEFITS OF THE MINITRACE S5

- High sensitivity
- Fast response time
- Compact and robust
- Ergonomic design
- Easy two-button operation
- 4 alarm thresholds
- Visual and audible alarm output
- Infrared interface
- X-ray sensitivity of >5 keV

If you want to read more about dose rate meters from Bertin, visit [their website!](#)

If you are in doubt about what MiniTRACE suits you best...

Read this!



MiniTRACE γ

Light & sturdy, the MiniTRACE γ survey meter measures personal exposure, along with X & Gamma radiations, to improve workers' safety in hazardous environments.

The MiniTRACE γ is available in 2 versions - S10S & S100S - each with its own energy & measurement range.

In accordance with the ALARA principle (As Low As Reasonably Achievable), the MiniTRACE γ allows for the assessment of personal exposure hazard faced by workers in controlled zones of nuclear power plants, reprocessing facilities, treatment centers & hospitals, etc. to help them better adapt their daily work according to the risk.

Ergonomic & easy to use, it also meets the operational needs of public service's units, such as firefighters, first responders, HAZardous MATerial teams, early warning & rapid response cells, radiation protection specialists (PCR), etc.

Fitted with fast response time (≈ 1 second), the MiniTRACE γ survey meter measures instantaneously the ambient dose equivalent rate $H^*(10)$ or the gamma radiation exposure levels, with a high level of autonomy (approximately 2,000 hours).

The MiniTRACE γ is also equipped with a built-in memory able to save up to 650 measured values of instant & accumulated radiation dose.

Both MiniTRACE γ S10S & S100S are available in radio version (S10R & S100R), allowing for survey meters to be integrated into a ShortLINK/SkyLINK communication network, with a maximum reach of 20 kilometers.





SaphyRAD S

The SaphyRAD S is a multiprobe survey meter developed to cover the needs of the nuclear and security market. This rugged, sensitive, and functional survey meter includes a wide and bright LCD display monitors and measures dose and Gamma dose rates in harsh environments even by non-specialists. Equipped with a full range of external probes, this versatile survey meter can discriminate Alpha/Beta radiation, monitor surface contamination, with reliability and accuracy, it can also measure dose rate in hard-to-reach areas and be used to research radioactive sources. In addition, the SaphyRAD S has an integrated simulator that is perfectly suited for training purposes. By utilizing a simulation probe, the user can recreate an Alpha/Beta contamination, enabling training in authentic conditions without the need for radioactive sources.



Benefits

- Robust: designed for use in harsh environments
- Large, high-resolution colour display
- Integrated simulation mode for training
- Designed for use with CBRN personal protective clothing
- Integrated GPS
- Specific algorithm for fast and reactive detection
- Large dose rate range: from 0.05 $\mu\text{Sv/h}$ to 10 Sv/h
- Complete range of external probes for source tracking and measuring multiple contamination, specially designed for use by non-radiation specialists.

← **Back to partner**



Stralingsdetectie > Handmonitoren

SaphyRAD C

The SaphyRAD C is a versatile multiprobe contamination meter used for monitoring Alpha and Beta contamination in harsh environments. It has been developed to meet all needs of contamination control for multiple markets such as the nuclear and NORM industries, medical structures & first responders, thanks to its integrated nuclide library.

It is equipped with a powerful algorithm to allow very fast and reliable detection of ionising radiation in a variety of civil applications. The SaphyRAD C has been designed ergonomically to be held with gloves on. Its large colour display makes the results perfectly easy to read. The SaphyRAD C possesses a wide range of contamination probe and it is compatible with all analogue probes on the market.



Ruggedized for harsh environment

The SaphyRAD C has a robust housing with 6 large buttons designed for use with gloves. This device is adapted to meet the needs of the Nuclear industry, but also of the NORM industry, first responders & medical structures.

Versatility

SaphyRAD C is designed for the detection & measurement of Alpha and/or Beta radiation sources with the use of external connected measuring probes. It has a wide dose rate range from 0.05 $\mu\text{Gy/h}$ to 10Gy/h.

It is also compatible with external analog probes of other systems.

Ease of use

SaphyRAD C is an ergonomic handheld device with a high image quality color screen. Some probes also include an embedded alarm & a distance control indicator.

Efficiency

SaphyRAD C works with a specific algorithm which was developed for a very fast and reactive detection of radiation sources.



SaphyRAD E Multiprobe - Bertin Instruments

SaphyRAD multiprobe alpha & beta contamination meter has been developed to meet all needs of contamination control for multiple markets such as the nuclear and NORM industries, medical structures & first responders, thanks to its integrated nuclide library. Its ergonomic interface and design have been especially conceived for use even by non-specialists.



SaphyRAD's wide range of contamination probes combined with its specific algorithm allow for a very fast and reactive detection. Depending on the probe, the operator can either assess small or large areas to detect alpha, beta/gamma or alpha & beta/gamma radioactive contamination. All data can be stored on an SD card for measurement recordings.

SaphyRAD E advantages

- user friendly embedded alarm & distance control indicator
- wide range of compatible probes
- adaptative nuclide library
- versatile for contamination & measurement operations
- ruggedized for harsh environment

[SaphyRAD E](#)

← **Back to partner**



Stralingsdetectie > Handmonitoren

AlphaE - Bertin Instruments

AlphaE is an electronic handheld device for fast and time-resolved radon monitoring in buildings, outdoors and mines. Typically, 80 % of the final result is achieved after 2 hours (faster response for higher values). Due to its ultra-lightweight design and sophisticated features, AlphaE is highly suitable also for surveying the personal radon exposure and dose at workplaces.



The AlphaE's favourable price-performance ratio makes it also interesting for service companies engaged in radon assessment and mitigation as well as for users in private homes. Up to 6 months battery life allows long-term measurement without mains power. Permanent operations via mains supply are possible via USB port.

Advantages AlphaE

- ultra-lightweight design
- sophisticated features
- wide measuring range for professional use
- up to 6 months autonomy
- suitable software included

Download the datasheet or contact our product specialist.

← **Back to partner**



Stralingsdetectie > Handmonitoren

SaphyRAD MS Dom-420 - Bertin Instruments

SaphyRAD MS is the latest multiprobe survey meter designed for operation in harsh environments such as military fields and first responders.



Together with the probes, SaphyRAD MS allows to cover most of the needs of first responders. SaphyRAD MS associates a wide range dose rate meter and external smart probes for source and hot spot search and contamination measurement. SaphyRAD MS includes a simulation mode which allows to train the users with high reality without the use of radioactive sources. Special care has been taken in the design of man machine interface for quick use by non radiation specialists.

SaphyRAD MS features

- designed for operation in harsh environments
- high resolution and large color LCD display
- built in simulation function for training
- designed for use with CBRN protective clothing
- built in GPS
- specific algorithm for very fast and reactive detection
- wide dose rate range 0.05 $\mu\text{Gy/h}$ to 10Gy/h
- comprehensive external smart probes for source search and multiple contamination measurement specially designed for use by non radiation specialists

[SaphyRAD MS](#)

[SaphyRAD MS probes](#)

Contact our PEO product specialist.

PERSOONLIJKE ELEKTRONISCHE DOSIMETERS



← [Back to partner](#)



Stralingsdetectie > [Persoonlijke elektronische dosimeters](#)

Saphydose gamma i

Saphydose Gamma i is an operational dosimeter measuring radiation in real time (Hp (10) X and γ dose).

This dosimeter is designed for people working in a controlled area (nuclear power plant, fuel reprocessing plant, research center, hospital, non-destructive testing service, etc.) or likely to be exposed (army, police, fire brigade, etc.).

It is compliant with the IEC 61526 standard for measurement of personal dose equivalents. Reliable and ergonomic, the Saphydose Gamma i is appreciated for its sturdy aluminum housing, its high resistance to electromagnetic fields and its long time battery life. It can be used individually or as part of our dosimetry management system.



MILIEUMONITORING





Stralingsdetectie > Milieumonitoring

GammaTRACER Spider Autonomous Gamma Monitor for Emergencies - Saphymo

The GammaTRACER Spider Autonomous Gamma Monitor (Saphymo) has been designed to cover the needs of first responders in an emergency scenario. Based on the proven GammaTRACER design, the probe provides reliably the measurement of the gamma dose rate and wireless data transmission to the crisis center by means of [SkyLINK](#) radio or Iridium satellite modem.



GammaTRACER Spider Autonomous Gamma Monitor for Emergencies features:

- built-in battery for up to 5 years operation
- innovative self-erecting design, very fast deployment
- ultra compact design
- emergency proof communication options
- SkyLINK radio modem (up to 100 km/60 mi)
- satellite modem (Iridium)
- hermetically sealed weatherproof housing
- wide measurement range: 20 nSv/h up to 10 Sv/h
- can be used to quickly enhance density of existing monitoring networks

GammaTRACER Spider demo



AlphaGUARD-Radon Monitor - Bertin Instruments

Overview:


The complete product line provides all accessories for radon in air, water, soil, building materials, progeny, thoron and calibration equipment to perform air, water, soil, exhalation measurements. The collected data can be linked to the DataVIEW software, allowing data download and storage as well as professional data analysis and reporting. With AlphaGUARD, bring your Radon Lab everywhere.



AlphaGUARD incorporates a pulse-counting ionization chamber (alpha spectroscopy).

Based on optimal chamber geometry and intelligent signal evaluation, this radon monitor is suitable for continuous monitoring of radon concentrations between 2 – 2 000 000 Bq/m³.

The DSP (Digital Signal Processing) technology provides highly effective differentiation ability between “real” radon data and all kinds of artefacts.

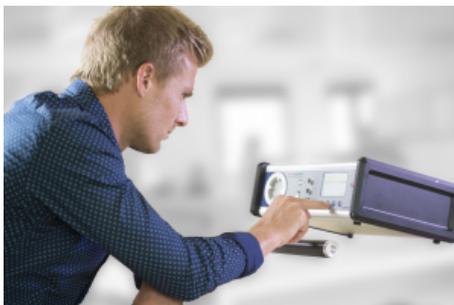

Features:

- 0.62 L pulsed ionization chamber
- Measuring range of 2 to 2,000,000 Bq/m³,
- Instrument calibrator error of 3%
- Storage capacity of up to 60,000 measurement points
- Storage of:
 - 400 days at 10 min measuring cycle
 - 2,500 days at 60 min measuring cycle
- Battery life of 10 days (40 days with external battery)
- 329 mm x 355 mm x 123 mm and weighs 6,2 kg (13,7 lbs)

Your Radon Lab - Everywhere:

- AquaKIT
- Soil gas Probe
- AlphaPM
- AlphaPUMP / LabPUMP
- Emanation / Calibration Container
- Exhalation Box
- On line Radon in water monitoring
- Valve Selector

Benefits:

- Quality at the highest level
- Long-term stable calibration factor (guaranteed 5 years)
- Calibration traceable to different national standards (PTB, NIST, NPL)
- Inbuilt quality assurance system for permanent validation of system operation and data
- Fast transient response

- DataVIEW PRO software

- Automatic background correction
- No sensitivity to high air humidity

Reasons to choose ALPHAGUARD - RADON MONITOR:

✓ Reference instrument with high sensitivity

✓ Calibration stability guaranteed for 5 years

✓ High performance for versatile applications

✓ Maintenance-free operation

Gallery:



AlphaGUARD - Your Radon lab everywhere

<https://youtu.be/oJaaYf9-Pbl>



SCAN TO VIEW VIDEO

← [Back to partner](#)



Stralingsdetectie > Milieumonitoring

ShortLINK Short-Range Environmental Radiation Monitoring Network - Bertin/Saphymo

The ShortLINK Wireless Communication System is a short-range, fully autonomous and private wireless network. You can use this system to transmit online data from connected low-power sensors or instruments to a central station. Unlike public cellular communication system standards (like GSM), this system is not dependant on the existence of an area covering cellular infrastructure. ShortLINK is generally installed in combination with a radiological network, like [GammaTRACER](#) and [DataExpert supervision software](#).



If you want to know more about Bertin data transmission systems, take a look at [our partner's website](#)!

SHORTLINK WIRELESS COMMUNICATION SYSTEM FEATURES AND BENEFITS

- Very low power consumption
- Operating distance up to 5 km (3 mi)
- Turnkey installation
- Long-term maintenance-free operation
- Can withstand temperatures from -40°C to 60°C (-40°F to 140°F)



Stralingsdetectie > Milieumonitoring

GammaTRACER Autonomous Radiation Monitoring Probe - Saphymo

The GammaTracer Autonomous Radiation Monitoring Probe from Bertin is designed to continuously measure, record, and transmit the environmental gamma dose rate. The probes continuously measure the gamma radiation dose.

Worldwide, there are more than 4.000 GammaTRACERs in operation.

The probes also offer a new dimension in wireless data collection. This is possible because the probes are equipped with a radio module, so you can use them with [SkyLINK](#) and [ShortLINK](#) for wireless data collection. GammaTRACER can store up to 12.800 data sets, depending on the probe type and measurement cycle.

The probe is available in four types: Basic, Wide, High and XL2.




UNLIMITED AUTONOMY

The GammaTRACER is an autonomous radiation monitoring probe. The monitor's batteries allow maintenance-free, non-stop operation for up to five years, and with an extended battery pack, it will even last up to ten years! This is possible because of the energy-saving chip technology.

But, if you choose the internal solar panel, the autonomy can be unlimited!

They can also resist extreme climatic and environmental conditions because the probes are independent of any physical connections.

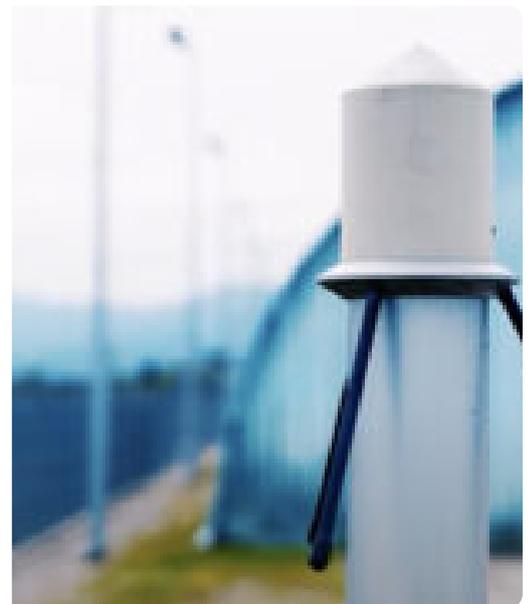

GAMMATRACER TYPES

GammaTRACER covers a broad range of radiation monitoring applications because there are multiple types available. The probes are deployable for multiple applications, for example nationwide monitoring, perimeter monitoring, and monitoring for nuclear facilities. The probes are not only suitable for routine, but also for emergency applications.

BASIC

The GammaTRACER Basic has a dose rate measurement range of 20 nSv/h to 10 mSv/h and an energy range of 45keV to 3MeV.

WIDE

The GammaTRACER Wide has a dose rate measurement range of 20 nSv/h to 10 Sv/h and just like the BASIC, also an energy range of 45 keV to 3 MeV.

HIGH

The GammaTRACER High has a dose rate measurement range of 1 mSv/h to 10 Sv/h and an energy range of 80 keV to 4,4 MeV.

XL2

The GammaTRACER XL2 has a dose rate measurement range of 10 nSv/h to 10 Sv/h and an energy range of 45 keV to 2 MeV. The XL2 type also has fast a response mode of 1 second.

ADDITIONAL OPTIONS

Even though the four GammaTRACE options already have a lot of features, there are also options you can choose from. All types can operate in temperatures ranging from -20°C (-4°F) to 50°C (122°F), but you can also choose for the option of -40°C (-40°F) to 60°C (140°F). Furthermore, you can choose additional sensors (rain, wind and weather), power supply by solar panels or a seismic qualified version.



BENEFITS & FEATURES

- Measures x-radiation and gamma radiation
- Measurement cycle, adjustable from 1 second to 120 minutes
- Battery lifetime up to ten years or even unlimited with solar panels
- Can store up to 12.800 data sets
- Type approval in several countries
- Maintenance-free
- Non-stop operation
- Easy to install

If you want to read more about GammaTRACER, take a look at [our partner's website!](#)

<https://youtu.be/59D0HZs64zw>



SCAN TO VIEW
VIDEO

If you have any questions...

Contact PEO!



BAB E Air Monitoring Beacon

The BAB-E fixed beacon is used for continuous monitoring of artificial Alpha and Beta aerosols, in Gamma environments as well as in the presence of natural Radon descendants. It has a double cover that allows it to withstand the most extreme climatic conditions for uninterrupted use outdoors (territorial surveillance, nuclear infrastructures, etc.). The data collected by the BAB-E can be accessed remotely and in real time on the DataEXPERT supervision software.

Features

- Can be used in controlled areas with high gamma background
- Compensation of radon progenies
- Use of standard sources for efficiency controls
- Ruggedized, can be used on dismantling and purification sites
- Available as stationary or mobile version
- Can be connected to a central monitoring network and trigger a general alarm

Technology

- The radioactive dust is deposited by air suction on a filter paper placed in the BAB beacons.
- The suction flow rate is about 5 m³/h (it depends on dustiness and type of filter paper).
- The flow rate is calculated from the depression measured between the filter and the pump. This allows to detect any tear or dust clogging.
- Placed one centimeter above the sample, the detection system is based on two 300 μm thick silicon diodes with a surface of 360 mm².
- The analog signal from the two diodes is amplified by a preamplifier with an output range of about 30mV/MeV.
- An amplifier increases the signal amplitude to 0.7V/MeV, and the signal is then used to produce the energy spectrum via an amplitude analyzer that encodes information to 512 channels.



← Back to partner



Stralingsdetectie > Milieumonitoring

SkyLINK Wide-Range Environmental Radiation Monitoring Network - Bertin/ Saphymo

The SkyLINK Wireless Communication System is a wide-range, fully autonomous and private wireless network. You can use this system to transmit online data from connected low-power sensors or instruments to a central station. Unlike public cellular communication system standards (like GSM), this system is not dependant on the existence of an area covering cellular infrastructure. The system generally includes a radiological network like GammaTRACER probes and the DataExpert supervision software.



For more information about Bertin Data Transmission systems, take a look at [our partner's website!](#)

The system structure allows its use in every situations, even in the most accidental ones (private wireless communication network and easy-to-install autonomous probes).

SKYLINK WIRELESS COMMUNICATION SYSTEM FEATURES

- Very low power consumption
- Operating distance up to 100 km (60 mi)
- Private network, so no regular transmission fees
- Easy interface to external instruments or host processors
- Turnkey system installation
- Long-term maintenance-free operation

<https://youtu.be/59D0HZs64zw>



SCAN TO VIEW
VIDEO

← **Back to partner**



Stralingsdetectie > Handmonitoren

AlphaE - Bertin Instruments

AlphaE is an electronic handheld device for fast and time-resolved radon monitoring in buildings, outdoors and mines. Typically, 80 % of the final result is achieved after 2 hours (faster response for higher values). Due to its ultra-lightweight design and sophisticated features, AlphaE is highly suitable also for surveying the personal radon exposure and dose at workplaces.



The AlphaE's favourable price-performance ratio makes it also interesting for service companies engaged in radon assessment and mitigation as well as for users in private homes. Up to 6 months battery life allows long-term measurement without mains power. Permanent operations via mains supply are possible via USB port.

Advantages AlphaE

- ultra-lightweight design
- sophisticated features
- wide measuring range for professional use
- up to 6 months autonomy
- suitable software included

Download the datasheet or contact our product specialist.



SpectroTRACER Environmental Radiation Monitor - Saphymo

SpectroTRACER is a continuous environmental radiation monitor for spectroscopy to measure very low gamma contamination (water: SpectroTRACER AQUA).



The SpectroTRACER produces a spectroscopic analysis of the detected nuclides identification. The SpectroTRACER is used for the measurement of radioactivity when a standard gamma dose rate monitor is not efficient enough and when it is necessary to discover the nature of the gamma radiation.

SpectroTRACER Environmental Monitor features:

- working temperature: -20 ° C to + 50 ° C. / option: -30 ° C to + 60 ° C
- max. 100 meters under water (SpectroTRACER -AQUA)
- IP68 certified
- relative humidity: 100%
- integrated sensors for temperature and humidity



Skydose Dosimetry System - Bertin Instruments

Skydose is an operational dosimetry system, designed to measure & monitor, in real time, the ambient dose level received by response teams in high exposure areas.



The operational dosimetry system Skydose consists in eight Saphydose γ RT teledosimeters, one Personal Digital Assistant (PDA), one Easydose configuration software, one Saphyr portable reader, as well as one to three RT-ZB05 routers.

The Skydose system is part of an ongoing approach based on the reduction of both collective and individual doses, in compliance with the ALARA principle (As Low As Reasonably Achievable). By optimizing the exposition to ionizing radiation, it aims at improving the operators' conditions of intervention, who will thus be able to focus safely on the objectives of their mission. The Skydose system only takes a **few minutes to install**. Thanks to the PDA, it ensures the in-field monitoring of an eight-person team equipped with Saphydose γ RT teledosimeters using mesh networking.

Flexible & robust, the Skydose system can reliably cover an entire infrastructure (a nuclear power plant, for example), thanks to one or more RT-ZB05 dedicated routers.

Fast & easy to deploy, the Skydose system can be used by operators, first-responders & non-specialists, inside & outside the risk areas.

Features

- easy and quick setting even by non-specialized staff
- automatic network synchronization
- suitable for indoor and outdoor use including reactor buildings
- suitable for emergency situations (sturdy - high dose and dose rate range)
- real-time hotspots detection to reduce the mission dose received by workers
- compliant with use in nuclear facilities (CEI 61526)
- low maintenance costs
- real-time, remote & simultaneous monitoring of the Saphydose γ RT dosimeters, for the team to react immediately in case of emergency
- the Skydose system can be installed and configured in a few minutes, and be safely stored in a ruggedized pelicase - several systems can operate simultaneously, without interference

Specifications

- detector: 2 energy-compensated silicon diodes
- energy range: **from 50 keV. to 7 MeV!**
- dose rate measurement range: 0.5 μ Sv. to 9,999.99 mSv
- dose measurement range: 1 μ Sv. to 9,999.99 mSv
- alarms: sound & visual
- battery lifetime in operation: 4,000 hours
- radio range: 300 m



Coriolis RECON - Bertin Instruments

De Coriolis RECON is een draagbare, lichte en robuuste bio-luchtmonsternemer voor de detectie van biologische oorlogsagentia, bedoeld voor CBRN-teams of eerstehulpverleners, met snelle inzet in geval van een gebeurtenis met verdenking van een biologische aanval. De Coriolis RECON zijn ontworpen om grote concentraties aerosolen te verzamelen in het ademende bereik van 0,5 tot 10 μm met een luchtstroomsnelheid van 600 l/min, waardoor ze representatiever zijn voor het milieu dan traditionele bio-aerosolmonsternemers.

Dankzij het vermogen om bio-aërosoldeeltjes in vloeibaar formaat te verzamelen, kan dit systeem worden gebruikt met snelle identificatietechnieken voor biologische agentia (immunoassay, PCR, enz.) om vroegtijdig te waarschuwen voor vernevelde biologische oorlogsmiddelen.



Introductievideo

Voordelen Coriolis RECON

- de meest efficiënte concentratie van biologische oorlogsvoering
- hoge luchtstroomsnelheid
- compatibel met eventuele stroomafwaartse experimenten voor snelle identificatie
- biobewaking met langdurige monitoring - tot 6 uur
- snelle inzet in een militaire/erstehulpcontext

Download de datasheet of neem contact op met onze productspecialist.



Coriolis Micro - Bertin Instruments

Coriolis μ is een innovatieve biologische luchtmonsternemer voor de beoordeling van bioverontreiniging, voornamelijk bedoeld voor luchtkwaliteitscontrole en luchtkwaliteitsmonitoring in onderzoek naar milieu en vervuiling, de farmaceutische, voedings- en veterinaire industrie, de biomedische en gezondheidsomgeving... Gebaseerd op een cycloontechnologie, gecombineerd met een hoog luchtdebiet, biedt Coriolis μ de meest efficiënte deeltjesopvang in 10 minuten. De biologische deeltjes zoals toxines, virussen, bacteriën, schimmels, pollen en sporen worden verzameld en geconcentreerd in een vloeistof, klaar om te worden geanalyseerd met microbiologische, cellulaire en moleculair biologische methoden.



Introductievideo

Voordelen Coriolis Micro

- de meest efficiënte concentratie van biologische deeltjes
- hoge luchtstroomsnelheid en optie voor langdurige monitoring – tot 6 uur
- compatibel met alle vervollexperimenten – deelbare monsters voor meerdere parallele analyses
- flexibele vloeistofmonsteruitvoer
- geen verzadiging van de verzamelmedia voor een geladen omgeving

Download de datasheet of neem contact op met onze productspecialist.

AFVAL- EN RECYCLINGBEHEER





Coriolis Consumables - Bertin Instruments

Coriolis-verbruiksartikelen maken deel uit van de cycloontechnologie: de scheiding van de in de lucht zwevende deeltjes van de luchtstroom is te danken aan het luchtdebiet, de luchtinlaatgeometrie, het ontwerp van de kegels en de verzamelvloeistof (oppervlakreactieve stof in lage concentratie).



Introductievideo

Verbruiksartikelen

- kegels & doppen: De kegels en doppen zijn speciaal ontworpen voor gebruik met de Coriolis μ
- vloeistofdoses verzamelen
- LTM-verbruiksartikelen: opvangvloeistof in fles en slangenset
- luchtinlaat: afhankelijk van je onderzoek kun je de luchtinlaat aanpassen
- standaard luchtinlaat: luchtinlaat compatibel met alle Coriolis voor klassieke samplin
- LTM-luchtinlaat: speciaal voor langdurige monitoring (alleen compatibel met het LTM-platform)
- 25 mm aansluiting LTM: ontworpen om een slangbevestiging voor te stellen (testkamer, besloten ruimte ...)

Voordelen Coriolis-verbruiksartikelen

- speciale kegels voor een zeer efficiënte verzameling
- adapter voor aansluiting op elke connector met een diameter van 25 mm
- eenvoudig in te stellen met een gekalibreerde dosis van 15 ml opvangvloeistof
- vloeistofverzameling compatibel met elk stroomafwaarts experiment
- kegels steriel en niet-steriel verkrijgbaar

Neem dan contact op met onze productspecialist.